PURE

Jongo

S3

① Get Connected

Download the free Pure Connect app to immerse yourself in music.

Download the free Pure Connect app on your iOS or Android device, and connect your Jongo to a world of music.

Pure Connect lets you stream your own music collection, gives you access to over 20,000 live radio stations from around the world, podcasts and a library of over 200,000 progammes.

from the Apple App Store

from Google Play

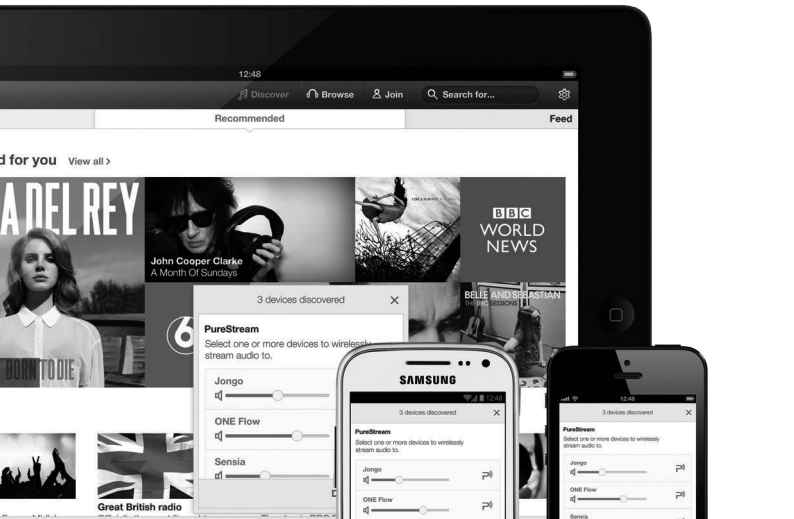

2 Setting up your first Jongo?

If you have already set up your first Jongo, jump to step 7.



Switch Jongo on.



When the Power light turns solid green, press the **Wi-Fi** button on the back.



Wait a few seconds for the Power light to flash amber.

3 Search for Jongo

On your mobile device search for available Wi-Fi networks. Your Jongo will be listed as a network. Connect to this network.

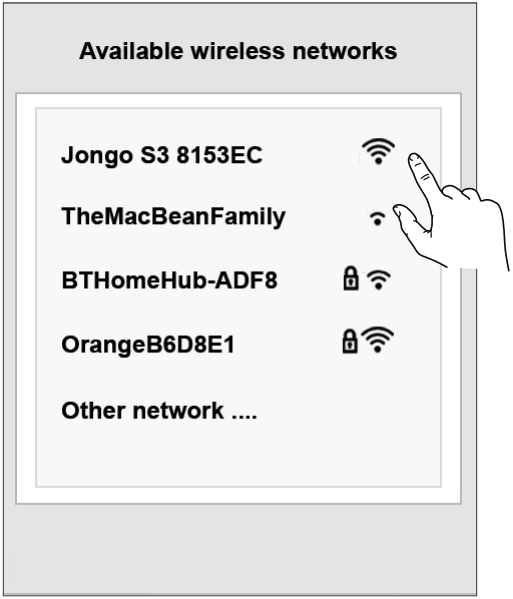

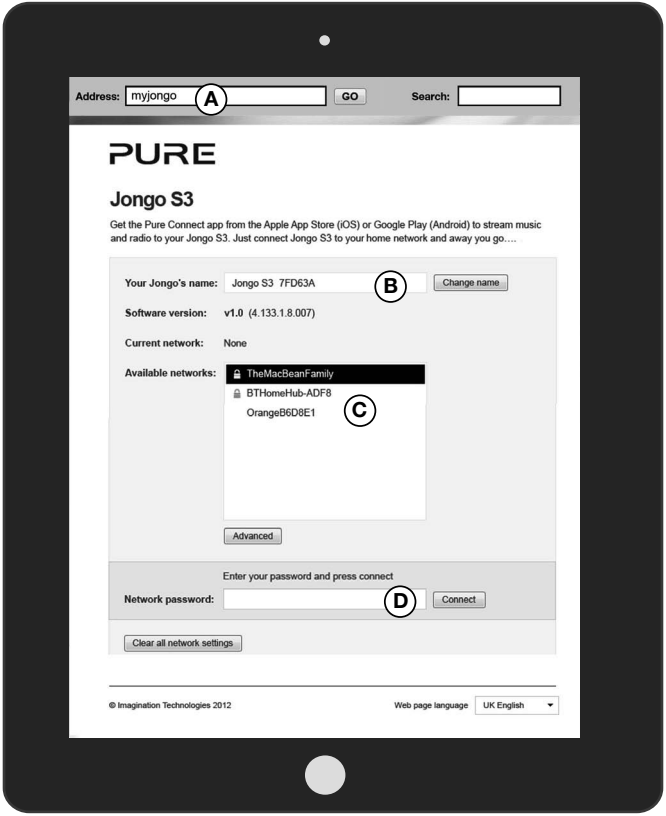
Address: myjongo
A
GO
Search:
PURE
Jongo S3
Get the Pure Connect app from the Apple App Store (iOS) or Google Play (Android) to stream music and radio to your Jongo S3. Just connect Jongo S3 to your home network and away you go....
Your Jongo's name: Jongo S3 7FD63A
B
Change name
Software version: v1.0 (4.133.1.8.007)
Current network: None
Available networks:
TheMacBeanFamily
BTHomeHub-ADF8
OrangeB6D8E1
C
Advanced
Enter your password and press connect
Network password:
D
Connect
Clear all network settings
© Imagination Technologies 2012
Web page language
UK English

4 Add Jongo to your wireless network

Ⓐ The Jongo Setup page should open automatically on your device. If not, open your internet browser and enter **myjongo** in the address bar.

Ⓑ If you want to rename your Jongo, type in the new name and tap **Change name**.

Ⓒ Select your wireless network.

Ⓓ Enter your network password if required and tap **Connect**.

On your mobile device search for available Wi-Fi networks. Your Jongo will be listed as a network. Connect to this network.

Once you click **Connect** the light will pulse and then turn solid green to show that your Jongo is connected.

If the connection fails, the light will flash red. Don't worry, this probably means you mistyped your Wi-Fi password. Just go back to step 2 and try again.



If the problem persists visit **support.pure.com**

5 Open the Pure Connect App and select the music you want to listen to.

You can choose from Pure Music*, live radio, on-demand content, ambient sounds and the music stored on your device.

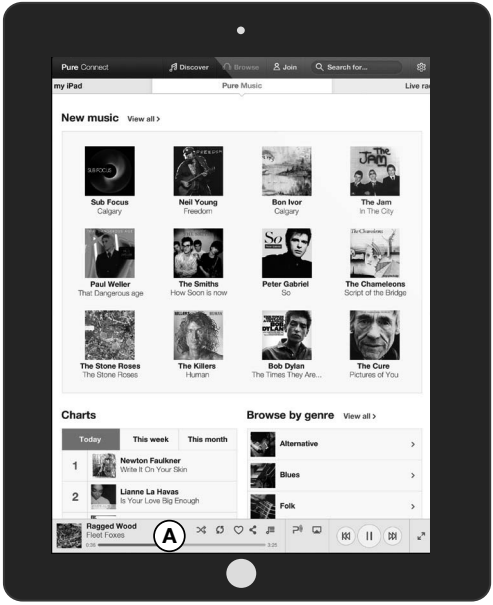

(A) After selecting the content that you want to listen to, the player bar will appear at the bottom of the window.

*Pure Music is only available in certain countries. Please see http://www.pure.com/availability/ for details.

6 Start streaming!

To stream to your Jongo:

Ⓐ Tap in the player bar to view a list of available Jongo devices on your network.

Ⓑ Tap next to your Jongo.

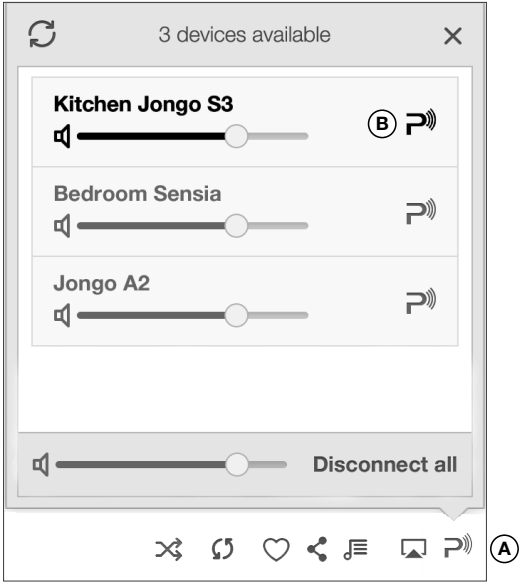

7 Adding another Jongo to your network?

1. Switch on your new Jongo.
2. Press and hold the **Wi-Fi** button on any Jongo that is already connected to your network until the Power light pulses green.
3. Press and hold the **Wi-Fi** button on the back of the new Jongo until the Power light pulses green.

After around 30 seconds, the Power lights on both Jongos will light steady green to confirm that the new Jongo is connected to your network.

Need more help?

Watch our Jongo setup video at:
www.pure.com/jongo-setup-video

Download the full user guide at: **support.pure.com**

Using Bluetooth



1. Insert the Bluetooth dongle into the back of Jongo.
2. Enable the Bluetooth option on your mobile device and search for Bluetooth devices.
3. Pair.
   If your device requires a key enter “0000”.

Using the auxiliary input



Connect the line out or headphone socket of your auxiliary device to the Aux in socket on your Jongo using a suitable cable. Jongo will automatically play any audio that is playing on the auxiliary device.

Changing audio profiles

Jongo features four audio profiles. You can change the audio profile by pressing the **Audio** button on the rear of Jongo. Each audio profile is represented by a set of icons on the LCD screen as shown below.



Mono 360º

Select this profile to activate all five speakers in Jongo. This option is ideal if placing Jongo in the middle of a room or table.



Outdoor boost

Select this profile to boost all five speakers in Jongo for outdoor use.



Stereo 360º

Select this profile to enable the four speakers to play stereo left and right audio - and enable the subwoofer. This option is ideal for creating a big stereo sound.



Stereo forward facing

Select this profile to enable stereo on the front two speakers and enable the subwoofer. This option is ideal if placing Jongo on a bookshelf or in a corner.

Jongo Safety Instructions

1. Read these instructions – All the safety and operating instructions should be read before this product is operated.
2. Keep these instructions – The safety and operating instructions should be retained for future reference.
3. Heed all warnings – All warnings on the appliance and in the operating instructions should be adhered to.
4. Follow all instructions – All operating and use instructions should be followed.
5. Clean only with dry cloth.
6. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
7. Only use attachments/accessories specified by the manufacturer.
8. Unplug the apparatus during lightning storms or when unused for long periods of time.
9. Refer all servicing to qualified personnel. Servicing is required when the apparatus has been damaged in any way, does not operate normally, or has been dropped.
10. To reduce the risk of electric shock, do not remove plastic cover or screws unless instructed by the user guide as there are no user-serviceable parts inside. Refer servicing to qualified personnel.
11. Use only power supplies listed in the user instructions (with model no.ZDD090150, manufactured by Pure.
12. Avoid liquids getting into Jongo. Should not be immersed in water, or used where this may happen, such as a bathroom.
13. The equipment's ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains etc.
14. WARNING: Please refer to the information on the bottom exterior of the enclosure for electrical and safety information before installing or operating the apparatus.
15. WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.
16. CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.
17. WARNING: The direct plug-in adapter is used as disconnect device, the disconnect device shall remain readily operable.
18. This equipment is a Class II or double insulated electrical appliance. It has been designed in such a way that it does not require a safety connection to electrical earth.

ChargePAK F1 Safety Instructions

1. Read the instructions for ChargePAK use in this document.
2. Only use your ChargePAK with original Pure products.
3. Store ChargePAK in a cool, dry place at normal room temperature. Remove from devices that will be stored unused for extended periods.
4. Do not puncture, modify, drop, throw, or cause other unnecessary shocks to your ChargePAK. May present a risk of fire, explosion, or chemical burn if mistreated.
5. Do not dispose of ChargePAK in a fire or incinerator, or leave in hot places such as a motor car under direct sunlight. Do not store near oven, stove, or other heat source.
6. Do not connect ChargePAK directly to an electrical source, such as a building outlet or automobile power-point. Do not place into a microwave oven, or any other high-pressure container.
7. Do not immerse ChargePAK in water or otherwise expose it to liquids.
8. Do not short circuit ChargePAK.
9. Do not use or charge a ChargePAK that appears to be leaking, discoloured, rusty, deformed; emitting an odour; or is otherwise abnormal.
10. Do not touch a leaking ChargePAK directly; wear protective material to remove and dispose of it properly immediately.
11. Do not store where children may have access.
12. Dispose of ChargePAK as per normal rechargeable batteries according to the local laws and regulations of your region. Some batteries may be recycled, and may be accepted for disposal at your local recycling centre.

Warranty information

Imagination Technologies Ltd. warrants to the end user that this product will be free from defects in materials and workmanship in the course of normal use for a period of two years from the date of purchase (One year for ChargePAK). This guarantee covers breakdowns due to manufacturing or design faults; it does not apply in cases such as accidental damage, however caused, wear and tear, negligence, adjustment, modification or repair not authorised by us. Should you have a problem with your unit please contact your supplier or contact Pure Support at: http://support.pure.com.

Disclaimer

Imagination Technologies Limited makes no representation or warranties with respect to the content of this document and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, Imagination Technologies Limited reserves the right to revise this publication and to make changes in it from time to time without obligation of Imagination Technologies Limited to notify any person or organization of such revisions or changes.

Trademarks

Jongo, ChargePAK, Pure, the Pure logo, Imagination Technologies, and the Imagination Technologies logo are trademarks or registered trademarks of Imagination Technologies Limited.

Copyright

Copyright © 2013 Imagination Technologies Limited. All rights reserved. No part of this publication may be copied or distributed, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form or by any means, electronic, mechanical, magnetic, manual or otherwise, or disclosed to third parties without the express written permission of Imagination Technologies Limited. Version 1 May 2013.

Acknowledgement of License Agreements

Portions of the code used in Jongo S3 are subject to the GPL, LPGL, BSD, and other open source licenses. For more details please refer to: http://www.pure.com/licensing

Pure Warranty Statement for Australia

This statement replaces any reference to warranty which may be contained elsewhere within this manual.

What do you need to do now?

Option 1: You can register your purchase on-line at https://www.pure.com/au/register/register.asp

Option 2: Or you can do nothing other than keep your proof of purchase as evidence of your purchase date. This proof of purchase would need to be presented if warranty service was ever required.

If you have any questions about your warranty you can call us toll free:

1800 988 268

What's covered by this warranty?

- Pure agrees to refund, repair or replace, at your election, without charge to you, any part found to be defective during the warranty period.
- If equipment has been used according to its accompanying instruction manual and is used in a domestic situation, a two year warranty period applies (excludes rechargeable ChargePAK where fitted. A one year warranty period applies to all ChargePAKs).

How do you make your claim?

Call 1800 988 268 for instructions on how to return your Pure product for warranty service or go to: http://support.pure.com/au/ and complete the contact us form.

What's NOT covered by this warranty?

Under this express warranty Pure will not be liable for loss or damage of any kind whatsoever, whether direct, indirect, incidental, consequential or otherwise.

- Replacement of parts due to normal wear and tear
- Products with serial number defacement, modification or removal
- Water damage or corrosion caused by dampness
- Any damage or deterioration due to shipments
- Any damage or deterioration due to shipment
- Any product which has been subjected to misuse, abuse or accident

Australian consumers — The benefits to the consumer given by this express warranty are in addition to other rights and remedies of the consumer under a law in relation to the goods or services to which this warranty relates. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law, You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Pure is distributed and supported in Australia by PIONEER ELECTRONICS AUSTRALIA PTY LTD, 5 ARCO LANE, HEATHERTON, VICTORIA, 3202

PURE

www.pure.com
connect.pure.com

Pure
Imagination Technologies Ltd
Home Park Estate
Kings Langley
Herts, WD4 8LZ
United Kingdom
http://support.pure.com

Pure Australasia Pty Ltd
PO Box 5049
Wonga Park
Victoria 3115
Australia
sales.au@pure.com
http://support.pure.com/au

104SJ